


# Specification For Approval - Connexions (UK) PLC

## 4 Core Speaker Cable

### 1.CONSTRUCTION

Item		A.Q.L	Description
Conductor	NO./mm	0.24	Stranded bare copper
	4 / 0.24×30	(+/-0.008 )	
Insulation	NO./mm	2.40	White,red,black,green flame retardant PVC insulation
	4 / 2.40	(+/-0.15 )	
Shield	NO./mm		Stranded cores cable
	-----	-----	
Jacket	NO./mm	7.30	Rip-cord
	7.30	( +/-0.30 )	Pink LSZH jacket

### 2.DESIGN

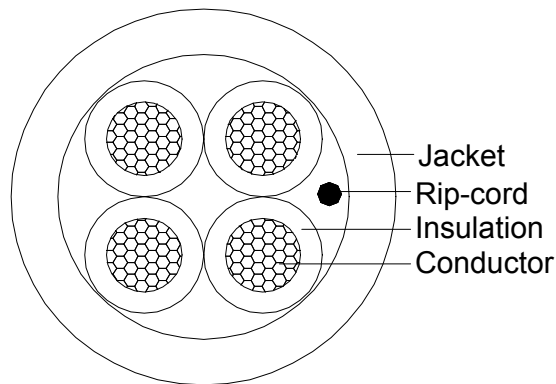

### 3.CHARACTERISTICS

Item	Description	Standards
1. Cond. Res.	20°C, Conductor DC Resistance	< 1.68 $\Omega$ / 100M
2. Insul. Res.	20°C, Insulation Resistance	> 200 M $\Omega$ .M
3. Rated Tem.	-----	60°C
4. Rated Voltage	-----	30 V